


NOTES:

- (1) ALL DIMENSIONS ARE GIVEN IN INCHES AND ARE APPROXIMATE.
- (2) MODEL G2-4 IS SHOWN.
- (3) ALLOW 45 INCHES ABOVE THE UNIT FOR SERVICING AND REPLACEMENT OF MODULES.
- (4) PROVIDE A DRAIN CAPABLE OF HANDLING AT LEAST 3.5 GALLONS PER MINUTE. DO NOT MAKE A DIRECT CONNECTION TO THE DRAIN. PROVIDE AN AIR GAP OF AT LEAST FOUR TIMES THE DIAMETER OF THE DRAIN PIPE TO CONFORM TO SANITATION CODES AND TO PERMIT THE OBSERVATION OF THE DRAIN FLOW. DO NOT INSTALL A VALVE IN DRAIN LINE OR USE PIPE SMALLER THAN LISTED IN TABLE.
- (5) A 20" - 5 MICRON PREFILTER IS PROVIDED TO BE MOUNTED ON THE INLET OF THE UNIT.

MODEL	NOMINAL CAPACITY (GPM/LPM)	NOMINAL CAPACITY (GPD/m ³ /h)	MODULE QTY & SIZE	APPROX. SYSTEM RECOVERY %	MOTOR (HP/KW)	ELECTRIC POWER REQUIRED (VAC)	DIMENSIONS L x W x H (INCHES/MILLIMETERS)
G2-2HE	2.78	4000	(2), 4" x 40"	50	2 HP	208-230/3/60	22 x 31 x 56
	10.52	0.63			1.49 KW	380-415/3/50	
G2-3HE	4.03	5800	(3), 4" x 40"	60	2 HP	208-230/3/60	22 x 31 x 56
	15.25	0.91			1.49 KW	380-415/3/50	
G2-4HE	5.21	7500	(4), 4" x 40"	60	2 HP	208-230/3/60	22 x 31 x 56
	19.72	1.18			1.49 KW	380-415/3/50	
G2-5HE	6.25	9000	(5), 4" x 40"	75	2 HP	208-230/3/60	22 x 31 x 56
	23.66	1.42			1.49 KW	380-415/3/50	
G2-6HE	6.94	10000	(6), 4" x 40"	75	2 HP	208-230/3/60	22 x 31 x 56
	26.29	1.58			1.49 KW	380-415/3/50	

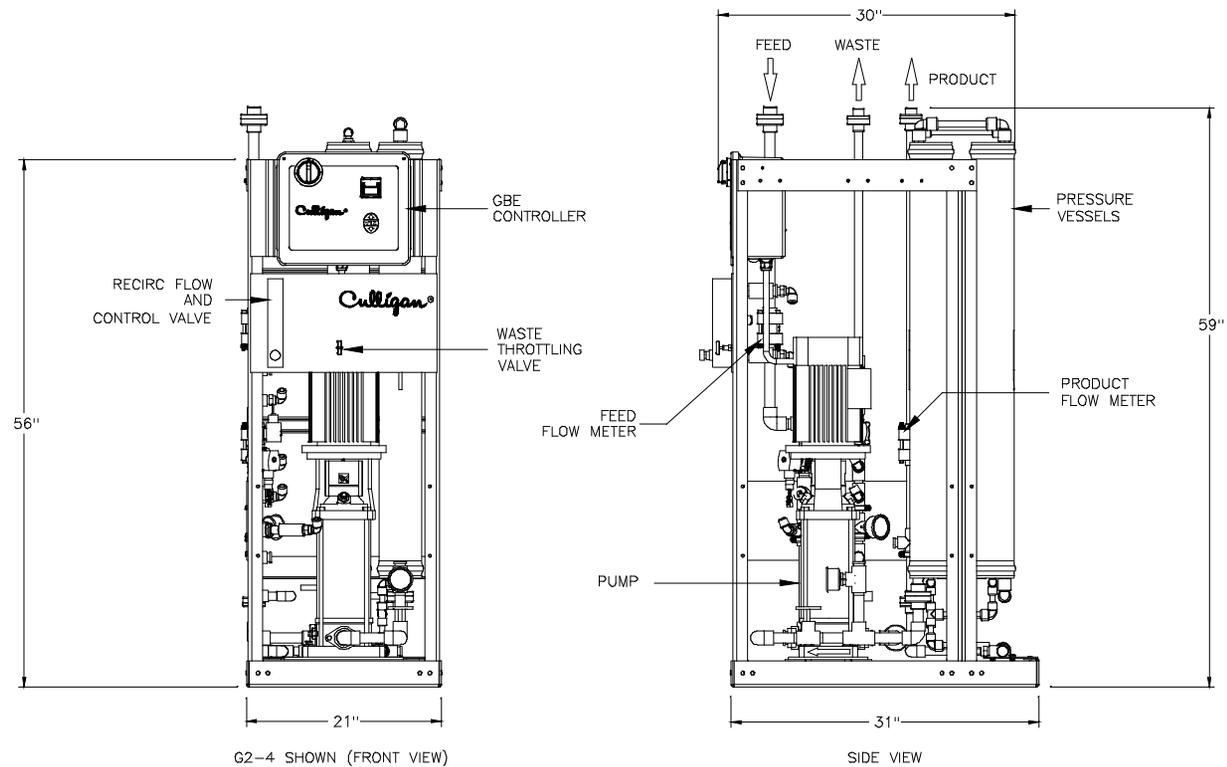

G2-4 SHOWN (FRONT VIEW)


SIDE VIEW

DO NOT SCALE DRAWING TOLERANCES: ±1/8" UNLESS OTHERWISE NOTED				 ENGINEERED SYSTEMS ROSEMONT, ILLINOIS PRINT AND BILL OF MATERIAL ARE NOT TO BE USED WITHOUT THE WRITTEN CONSENT OF CULLIGAN INTERNATIONAL CO.		NAME SERIES G2 HE (2HE - 6HE) REVERSE OSMOSIS SYSTEMS TECHNICAL DATA SHEET	
Let.	Change	By	App			Date	DETAILED BY: KMR 11/19/2008
						REF. NO.	PART NO. SERIES_G2HE-1

NOTES:

- (1) ALL DIMENSIONS ARE GIVEN IN INCHES AND ARE APPROXIMATE.
- (2) MODEL G2-8 IS SHOWN.
- (3) ALLOW 45 INCHES ABOVE THE UNIT FOR SERVICING AND REPLACEMENT OF MODULES.
- (4) PROVIDE A DRAIN CAPABLE OF HANDLING AT LEAST 6.5 GALLONS PER MINUTE. DO NOT MAKE A DIRECT CONNECTION TO THE DRAIN. PROVIDE AN AIR GAP OF AT LEAST FOUR TIMES THE DIAMETER OF THE DRAIN PIPE TO CONFORM TO SANITATION CODES AND TO PERMIT THE OBSERVATION OF THE DRAIN FLOW. DO NOT INSTALL A VALVE IN DRAIN LINE OR USE PIPE SMALLER THAN LISTED IN TABLE.
- (5) A 20" - 5 MICRON PREFILTER IS PROVIDED TO BE MOUNTED ON THE INLET OF THE UNIT.

MODEL	NOMINAL CAPACITY (GPM/LPM)	NOMINAL CAPACITY (GPD/m ³ /h)	MODULE QTY & SIZE	APPROX. SYSTEM RECOVERY %	MOTOR (HP/KW)	ELECTRIC POWER REQUIRED (VAC)	DIMENSIONS L x W x H (INCHES/MILIMETERS)
G2-7HE	9.2	13250	(7), 4" x 40"	75	3 HP	208-230/3/60	30.5 x 31 x 56
	34.83	2.09			2.24 KW	380-415/3/50	775 x 787 x 1425
G2-8HE	10.42	15000	(8), 4" x 40"	75	3 HP	208-230/3/60	30.5 x 31 x 56
	39.43	2.37			2.24 KW	380-415/3/50	775 x 787 x 1425
G2-9HE	11.98	17250	(9), 4" x 40"	75	3 HP	208-230/3/60	30.5 x 31 x 56
	45.35	2.72			2.24 KW	380-415/3/50	775 x 787 x 1425
G2-10HE	13.19	19000	(10), 4" x 40"	75	3 HP	208-230/3/60	30.5 x 31 x 56
	49.95	3			2.24 KW	380-415/3/50	775 x 787 x 1425

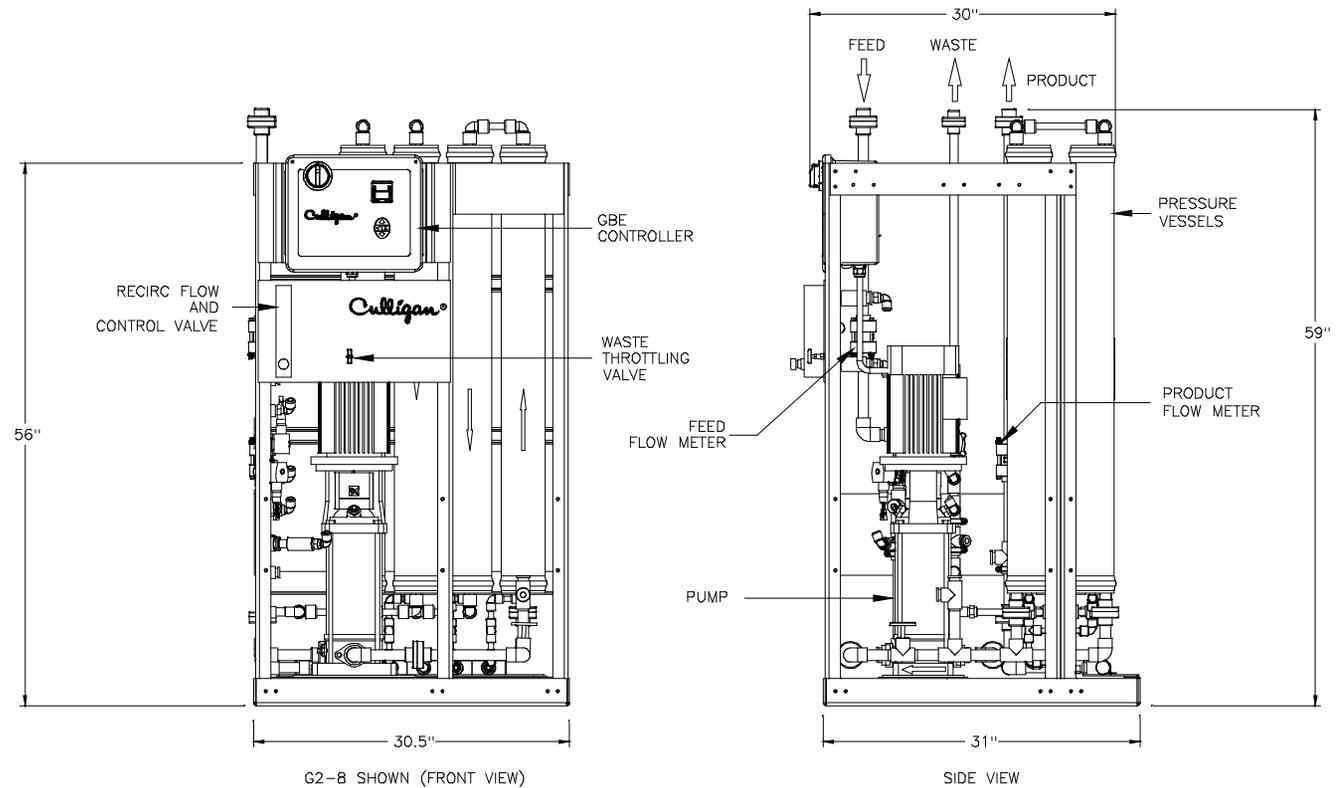

DO NOT SCALE DRAWING
TOLERANCES: ±1/8" UNLESS OTHERWISE NOTED

Let.	Change	By	App	Date

Culligan®
ENGINEERED SYSTEMS
ROSEMONT, ILLINOIS

PRINT AND BILL OF MATERIAL ARE NOT TO BE USED WITHOUT THE WRITTEN CONSENT OF CULLIGAN INTERNATIONAL CO.

NAME SERIES G2 HE (7HE - 10HE) REVERSE OSMOSIS SYSTEMS TECHNICAL DATA SHEET		
DETAILED BY: KMR 11/19/2008	APP. BY:	SHEET 1 OF 1
REF. NO.	PART NO. SERIES_G2HE-2	